

ARDRA ALU 30x44 -en- LINEAR LIGHTING 145

LED BAR FOR INTERIORS


APPLICATIONS:

- Technical, linear architectural lighting for ceilings and walls, possibility of mono or bidirectional light with various LED configurations
- Ceiling lighting (high spaces), more light intensity, for retail, offices, restaurants, hotels and homes
- Architectural linear lighting
- Suspended lighting with specific fixing kit
- Interior projects


DESCRIPTION:

Material: high quality natural anodized aluminum with great heat dissipation capacity, with opal, transparent or prismatic opal and / or transparent diffuser.

Dimensions: 40mm high and 30.8mm wide. Minimum length 30cm, maximum 300cm (other measures on request).



DATA SHEET

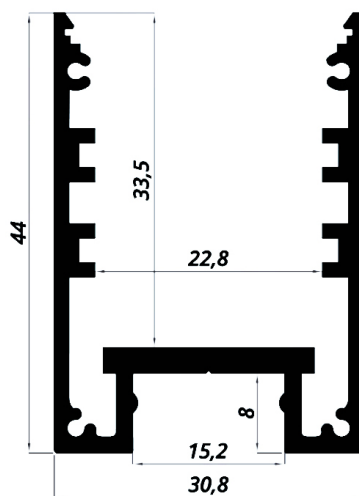

CHARACTERISTICS

LED module: mid-power LEDs on metal core PCB

PCB LED 10W

W/mt	K	lm/mt	LED/mt - Type - V	CRI
10	2700	1140	168 - SMD 2835 - 24V	>90
10	3000	1220	168 - SMD 2835 - 24V	>90
10	4000	1300	168 - SMD 2835 - 24V	>90

ARDRA ALU 30x44 -en- LINEAR LIGHTING 145

PCB LED 20W

W/mt	K	lm/mt	LED/mt - Type - V	CRI
20	2700	2370	168 - SMD 2835 - 24V	>90
20	3000	2520	168 - SMD 2835 - 24V	>90
20	4000	2600	168 - SMD 2835 - 24V	>90

PCB LED 30W

W/mt	K	lm/mt	LED/mt - Type - V	CRI
30	2700	3780	100 - SMD 2835 - 24V	>80
30	3000	3990	100 - SMD 2835 - 24V	>80
30	4000	4200	100 - SMD 2835 - 24V	>80

NOTES AND ACCESSORIES

- Specific fixing kit for suspended installation.
- Standard cable length 1500mm, other sizes on request.
- Power supplies not included, to be ordered separately.

Last update: 31 July 2024