

ARDRA SLIM 15 -en- LINEAR LIGHTING O O11



INDOOR LED PROFILE

APPLICATIONS:

- Complementary furnishing items (kitchen / office / home)
- Interior design projects (stairs / storage / floors)
- Exhibition shelves LED lighting (retail / stores)
- Independent LED lamp

DESCRIPTION:

Material: Natural anodised aluminum with transparent or opaline diffuser, resistant to UV rays and shocks.


Dimensions: 15mm in height and 17.5mm in width. Minimum length 30cm, maximum 300cm (other sizes on request)



IP40



DATA SHEET

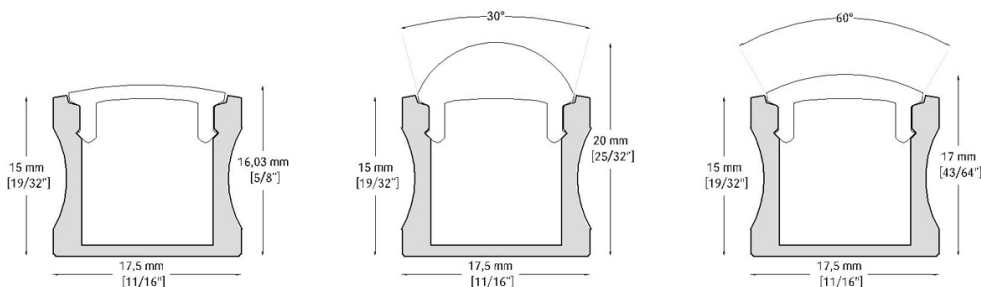

CHARACTERISTICS

LED module: mid-power LEDs on metal core PCB

PCB LED 10W

W/mt	K	lm/mt	LED/mt - Type - V	CRI
10	2700	1140	168 - SMD 2835 - 24V	>90
10	3000	1220	168 - SMD 2835 - 24V	>90
10	4000	1300	168 - SMD 2835 - 24V	>90

PCB LED 20W

W/mt	K	lm/mt	LED/mt - Type - V	CRI
20	2700	2370	168 - SMD 2835 - 24V	>90
20	3000	2520	168 - SMD 2835 - 24V	>90
20	4000	2600	168 - SMD 2835 - 24V	>90

ARDRA SLIM 15 -en- LINEAR LIGHTING o o11

LED CCT 24V

W/mt	K	lm/mt	LED/mt - V	CRI
16	1800/3000K	720	192 - 24V	90+
16	2700/6000K	1300	120 - 24V	90+
18	2700/6000K	1800	240 - 24V	90+
28	2700/6000K	4000	192 - 24V	80+

LED RGB 24V

W/mt	K	lm/mt	LED/mt - V	CRI
14	COB RGB DIGITAL	-	720 - 24V	-
16	COB RGB + 3000K	-	896 - 24V	-

NOTES AND ACCESSORIES

- Touch switch or Sensor pir.
- 30 ° or 60 ° optics for a targeted light distribution
- Controller for RGB management and dim light dimming.
- Standard cable length 1500mm, other sizes on request.
- Power supplies not included, to be ordered separately.

Last update: 6 December 2024